


A-102 118-130
ZANUSI CORP OF AMERICA
A-22 41 12/15/79

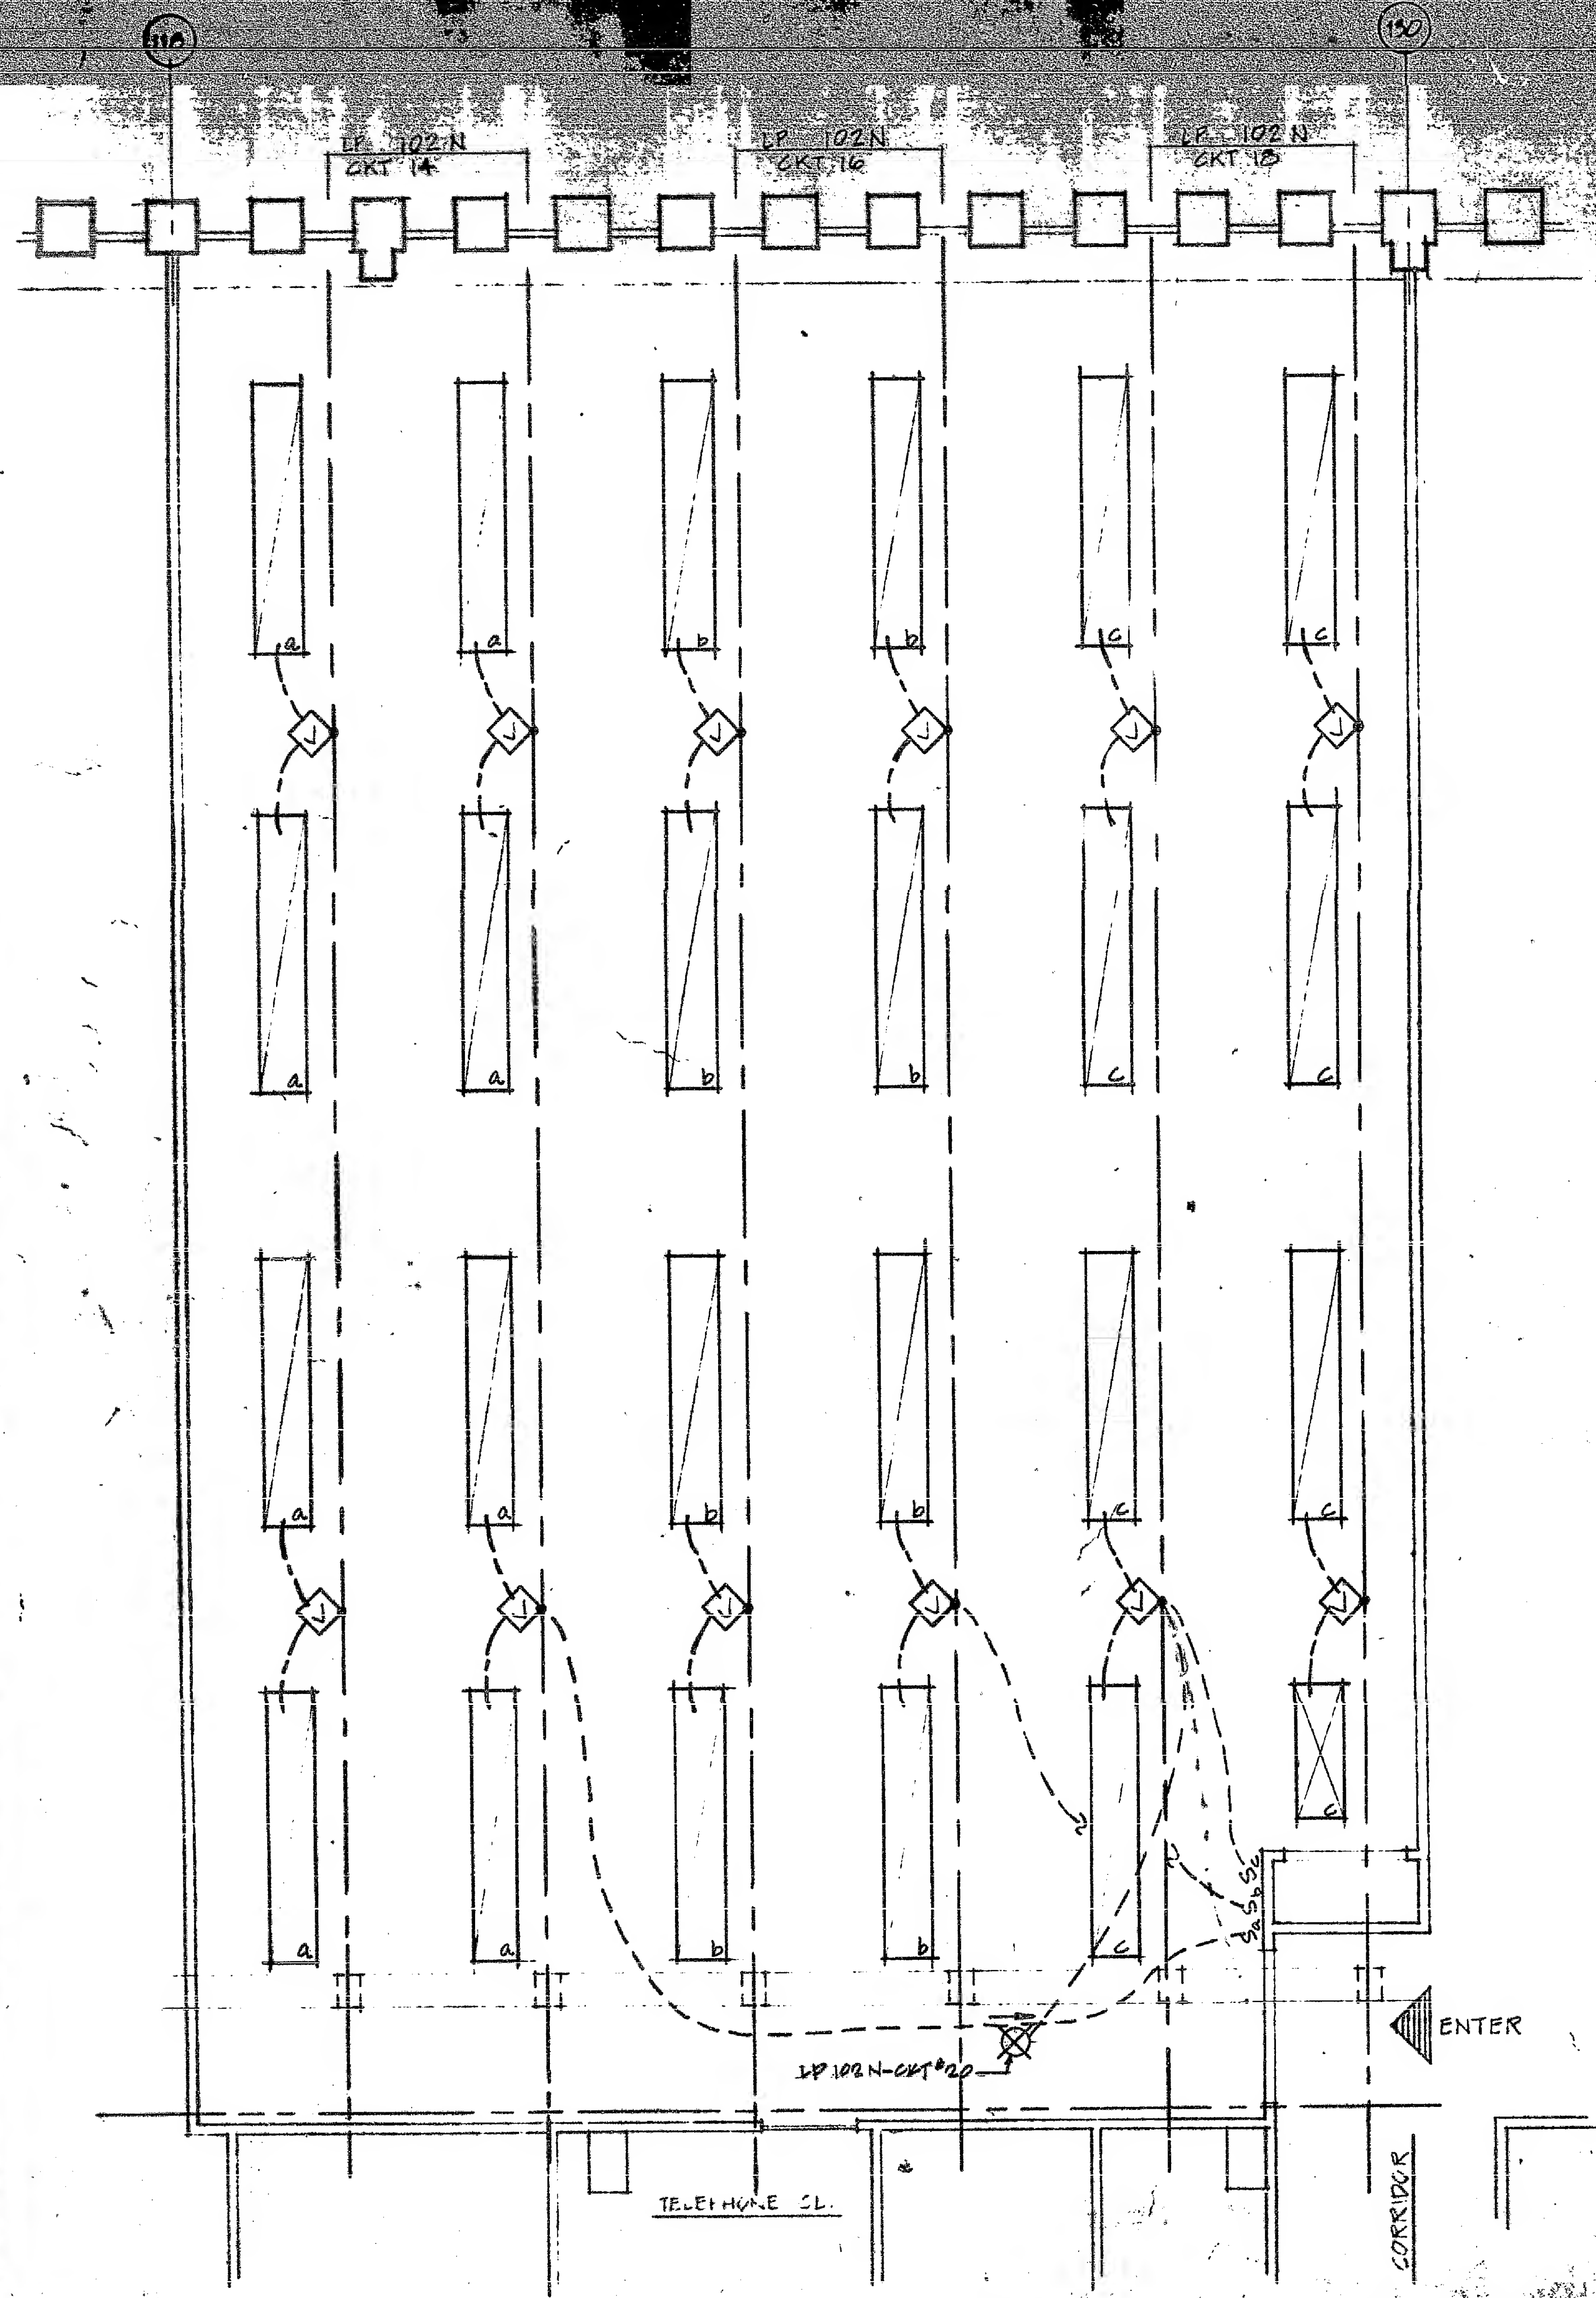


ELECTRICAL NOTES:

1. All conduits to have a minimum of 2 #12 THHN wires (UL Standard #63), and shall be minimum of 3/4" unless otherwise noted.
2. All electrical floor outlet units (housing) shall be set flush on the concrete or vinyl floor.
3. The contractor shall install in all after set fittings, two (2) "Palasal Packets" (fire stop), one of each side of the afterset baffled.
4. All device plates for wall outlets shall be brush #316 finish, anodized aluminum. Device plate for telephone outlets shall contain a bushed hole.
5. Power interruptions and core drilling will be permitted, only between the hours of 8:00 PM and 8:00 AM.
6. Contractor will not be permitted to chase the floor.
7. When installing receptacle outlets, splices and/or reconnection in the underfloor system shall be made in the header duct only. Contractor shall install two from each receptacle to the header duct. All unused wiring between the removed outlets and header duct is to be removed by the contractor.
8. Circuits that are designated with numbers 1-6 inclusive and 31 and above are not existing on the header duct. Contractor is to install and connect the appropriate quantity of wires, from item to be services, back to the designated panel in the floor cell and header duct.
9. When installing any special purpose outlets, that are shown connected to circuits other than circuit 7-30 inclusive, the wires shall be installed by the contractor between the outlet and the indicated panel. The contractor shall modify the panel directory to reflect the circuit availability.
10. Minimum distance for all combination telephone/duplex receptacles and/or receptacles shall be 6" from walls or connectors, unless otherwise indicated on drawings.

11- FOR MATERIALS (ELECTRICAL) FURNISHED BY THE PORT AUTHORITY
SEE DRAWING 4-1-2

NOTE:
ALL WORK TO BE DONE IN ACCORDANCE WITH
THE NATIONAL ELECTRICAL CODE AND THE NYCEC.

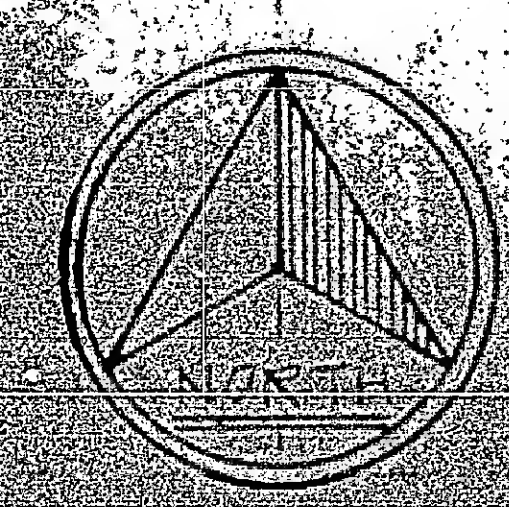

KEY PLAN

